



BJÖRK HAND DRYER

3000/3002/3006

High-speed
IR-sensor and electronic timer
5-year warranty




reddot award
winner

BJÖRK high-speed hand dryer in award-winning design, featuring unbroken lines and a slender, almost weightless look in modern Scandinavian design. The hand dryer can be equipped with top plate in six available colours. Add a HEPA filter that absorbs impurities in the air and helps extend the lifespan of the hand dryer.

Technical data

Type	BJÖRK HAND DRYER Prod. No.: 3000, 3002, 3006 Touch-free warm-air hand dryer with IR sensor
Dimensions	H: 330 mm x W: 205 mm x D: 183 mm
Material	Powder coated stainless steel
Drying cycle	10-15 sec.
Connection	230 V, 50/60 Hz, Class I
Total wattage	1600 W
Heating element	450-900 W
Motor	350-700 W
Noise level	76 dBA
Max. air capacity	75-100 m/sec.
Max. air outlet temperature	60° C
Net Weight	5.7 kg
IP rating	IP31
Tender text	Touch-free hand dryer. Powder coated stainless steel housing. Infra-red sensor and electronic timer, drying cycle: 10-15 sec. IP31, 230 V, 50/60 Hz, 1600 W, Class I (earthed). 76 dBA. Net weight: 5.7 kg. H: 330 mm x W: 205 mm x D: 183 mm

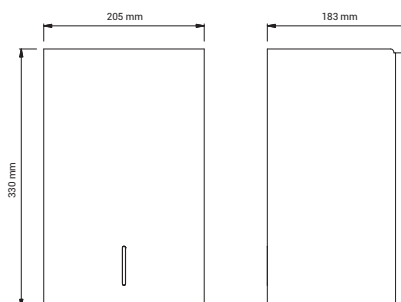

Application

BJÖRK is a powerful machine with high air velocity and therefore best suited for places with some tolerance of noise. The elegant design line is suitable for all types of public toilets.

References

Offices and administration, shopping malls, restaurants, hotels, airports and public swimming pools, schools, public institutions and cultural centres.

Standard color

Prod. No.: 3000, RAL 9003, white, gloss 60.
Prod. No.: 3002, RAL Classic colours.
Prod. No.: 3006, RAL 9005, matt black, gloss 10.

Activation

Infrared sensor and electronic timer. Touchfree. Activation distance adjustable between 51 - 330 mm. Automatic stop after 60 seconds of continuous use.

Motor type

Commutator motor with carbon brushes. 12,000-18,000 revolutions/min.

Protection

Automatic thermal cut-out in both motor and heating element.

Installation

Machine intended for wall-mounting and fixed installation via circuit-breaker. Installation must be carried out by a qualified electrician.

Compliance



Top plate

The self-adhesive laminate top plate is available in six optional standard colours.

