

# STAINLESS DESIGN AE HAND DRYER

## 280/290/291


IR sensor  
Sturdy and vandal-resistant  
5-year warranty



Stainless Design AE is an extremely sturdy all-round hand dryer. Stainless Design is a complete product line for commercial toilets, in which quality and aesthetics are paramount. The entire stainless product line is made of strong quality materials, featuring a unique design with a beautifully arched housing in brushed stainless steel. The hand dryer comes with a 5-year warranty on all functional parts – covering even in cases of vandalism!

### Technical data

<b>Type</b>	<b>STAINLESS DESIGN AE HAND DRYER</b> Prod. No.: 280, 290, 291  Touch-free warm-air hand dryer with IR sensor
<b>Dimensions</b>	H: 379 mm x B: 306 mm x D: 179 mm
<b>Material</b>	1.5 mm brushed stainless steel AISI 304
<b>Drying cycle</b>	Ca. 20-25 sec.
<b>Connection</b>	230 V, 50/60 Hz, Class I
<b>Total wattage</b>	2360 W
<b>Standby wattage</b>	0.8 W
<b>Heating element</b>	2250 W
<b>Motor</b>	110 W
<b>Noise level</b>	62 dBA
<b>Max. air volume</b>	72 l/sec.
<b>Max. air capacity</b>	20,5 m/sec.
<b>Max. air outlet temperature</b>	65° C
<b>Net weight</b>	8 kg
<b>IP rating</b>	IP23
<b>Tender text</b>	Touch-free hand dryer with housing in 1.5 mm brushed, stainless steel. Infra-red sensor and electronic timer, drying cycle 20-25 sec., IP23, 230 V, 50/60 Hz, 2360 W, Class I (earthed). 62 dBA. Net weight 8 kg. H: 379 mm x B: 306 mm x D: 179 mm

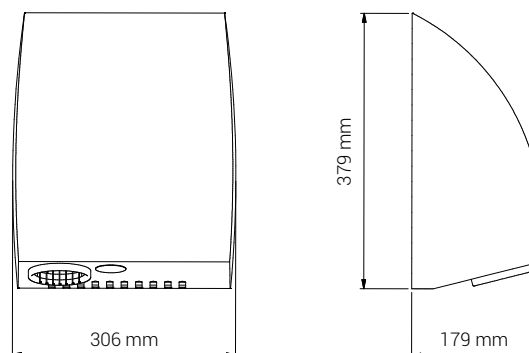

### Application

The Stainless Design product line combines hygiene and durability with classic elegance to suit any commercial bathroom. The products are designed specifically for use in public toilets where low maintenance is called for, and equipment must be able to withstand rough treatment.

### References

Offices and administration, shopping malls, restaurants, hotels, airports, train stations, sports facilities and public swimming pools, schools, public institutions, and cultural centres.

### Standard colour

Prod. No.: 280, Brushed stainless steel.  
Prod. No.: 290, Polished stainless steel.  
Prod. No.: 291, Optional RAL colour.

### Motortype

Brushless induction motor with radial fan. Sealed ball bearings. Protected against moisture.

### Activation

Infra-red sensor and electronic timer. Touchfree. Micro-processor activating with a 0.2 second delay. Stopping after 4 seconds or 5 minutes of continuous operation.

### Protection

Automatic thermal cut-out in motor and heating element.

### Installation

Machine intended for wall-mounting and fixed installation via circuit-breaker. Installation must be carried out by a qualified electrician.

### Approval

