



STAINLESS DESIGN MINI HAND DRYER


281


IR sensor
Small
3-year warranty



Small, but effective hand dryer. Stainless Design is a complete product line for commercial toilets, in which quality and aesthetics are paramount. The entire stainless product line is made of strong quality materials, featuring unique design with a beautifully arched housing in brushed stainless steel. The hand dryer comes with a 3-year warranty on all functional parts.

Technical data

Type	STAINLESS DESIGN MINI HAND DRYER Prod. No.: 281 Touch-free warm-air hand dryer with IR sensor
Dimensions	H: 340 mm x B: 228 mm x D: 156 mm
Material	1.5 mm brushed stainless steel AISI 304
Drying cycle	Approx. 30 sec.
Connection	230 V, 50/60 Hz, Class I 
Total wattage	1800 W
Heating element	1700 W
Motor	100 W
Noice level	64 dBA
Max. air volume	55 l/sec.
Max. air capacity	15,5 m/sec.
Max. air outlet temperature	55° C
Net weight	6 kg
IP rating	IP21
Tender text	Touch-free hand dryer with housing in 1.5 mm brushed, stainless steel. Infra-red sensor and electronic timer, drying cycle approx. 30 sec. IP21, 230 V, 50/60 Hz, 1800 W, Class I (earthed). 64 dBA. Net weight 6 kg. H: 340 mm x B: 228 mm x D: 156 mm

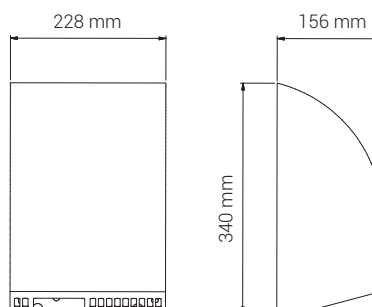

Application

The Stainless Design product line combines hygiene and durability with classic elegance to suit any commercial bathroom. The products are designed specifically for use in public toilets where low-maintenance is called for, and equipment must be able to withstand rough treatment.

References

Offices and administration, private homes, restaurants, sport clubs, public institutions and cultural centres.

Standard colour

Brushed stainless steel. Also available in all RAL colours.

Motor type

Brushless induction motor. 3450 revolutions/min.

Activation

Infrared sensor and electronic timer. Touchfree. Micro-processor activation with a 2 second delay and after 60 seconds of continuous use.

Protection

Automatic thermal cut-out in motor and heating element.

Installation

Machine intended for wall-mounting and fixed installation via circuit-breaker. Installation must be carried out by a qualified electrician.

Approval

