

TURBO LOW NOISE HAND DRYER

346/347/348


Touchless
Powerful low-noise
5-year warranty



TURBO Low Noise is a touch-free high-speed hand dryer with adjustable speed and activation distance. A dry time of only 10-15 seconds, 5-year warranty and a modern cylindrical space-saving design make TURBO Low Noise a very popular machine.

Technical data

Type	TURBO LOW NOISE HAND DRYER Prod. No.: 346, 347, 348 Warm-air hand dryer with IR- sensor
Dimensions	H: 287 mm x B: 205 mm x D: 180 mm
Material	346: Steel/enamel, white 347: Stainless steel, brushed 348: Stainless steel, black
Drying cycle	10-15 sec.
Connection	230 V, 50/60 Hz, Class I
Total wattage	700-1400 W
Heating element	350-700 W (adjustable)
Motor	350-700 W (adjustable)
Noise level	62,8-68,2 dbA @ 1 m
Max. air volume	1,8 m³/min
Max. air capacity	65-95 m/sec. (adjustable)
Max. air outlet temperature	55° C
Net weight	5,5 kg
IP rating	IP31
Tender text	Touch-free low noise hand dryer with cabinet in steel/enamel, brushed/painted stainless steel. Infrared sensor and electronic timer, drying cycle: 10-15 sec. IP31, 230 V, 50/60 Hz, 700-1400 W, Class I (earthed). 62.8-68.2 dbA. Net weight 5.5 kg. H: 287 mm x B: 205 mm x D: 180 mm

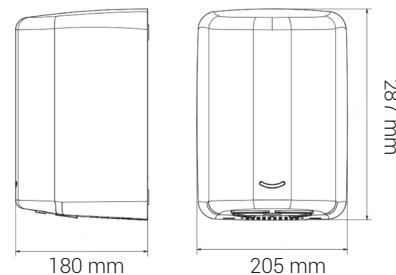

Application

TURBO Low Noise is a hand dryer that manages to combine power with a lower sound level without compromising on short drying time. Featuring long service life and low energy consumption, the machine is an eco-friendly choice for all high-traffic public and commercial areas.

References

Offices and administration, shopping malls, restaurants, hotels, airports, sports facilities and public swimming pools, schools, public institutions, and cultural centres.

Standard colours

Prod. No.: 346, White enamelled steel.
Prod. No.: 347, Brushed stainless steel.
Prod. No.: 348, Matt black stainless steel.

Motor type

Commutator motor with carbon brushes. 12,000-18,000 revolutions/min.

Activation

Touch-free. Infrared sensor and electronic timer. Activation distance adjustable between 150-190 mm. Automatic stop after 60 seconds of continuous use.

Protection

Automatic thermal cut-out in both motor and heating element.

Installation

Machine intended for wall-mounting and fixed installation via circuit-breaker. Installation must be carried out by a qualified electrician.

Approval

